
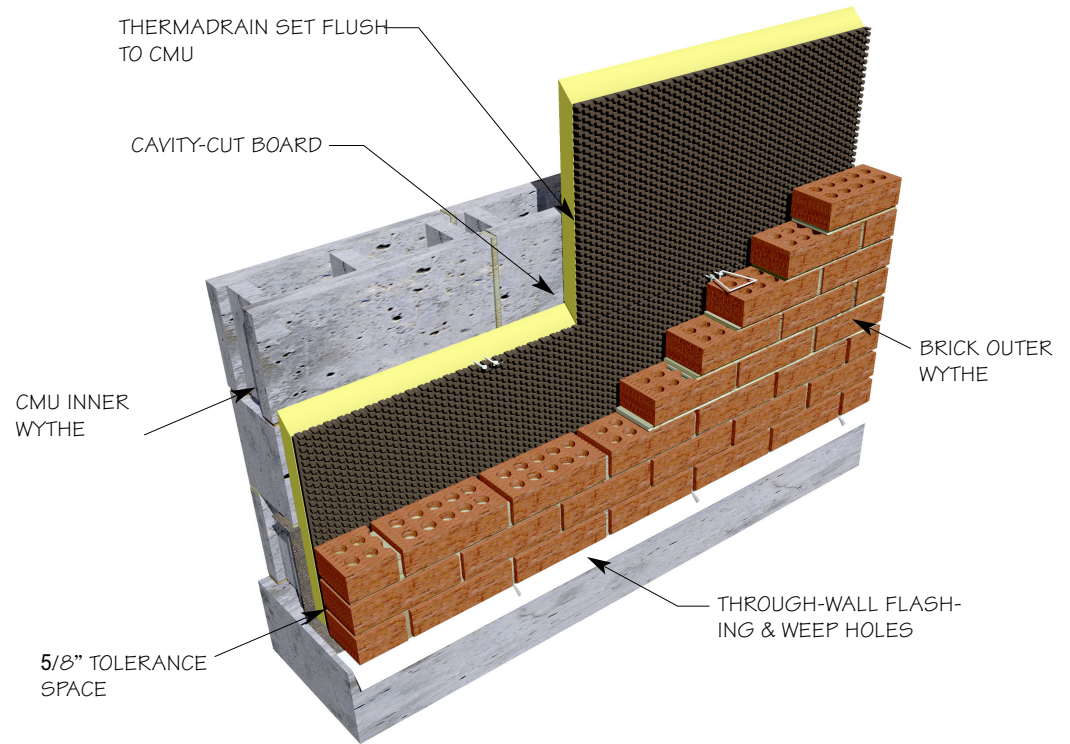


THERMADRAIN CAVITY WALL DETAIL

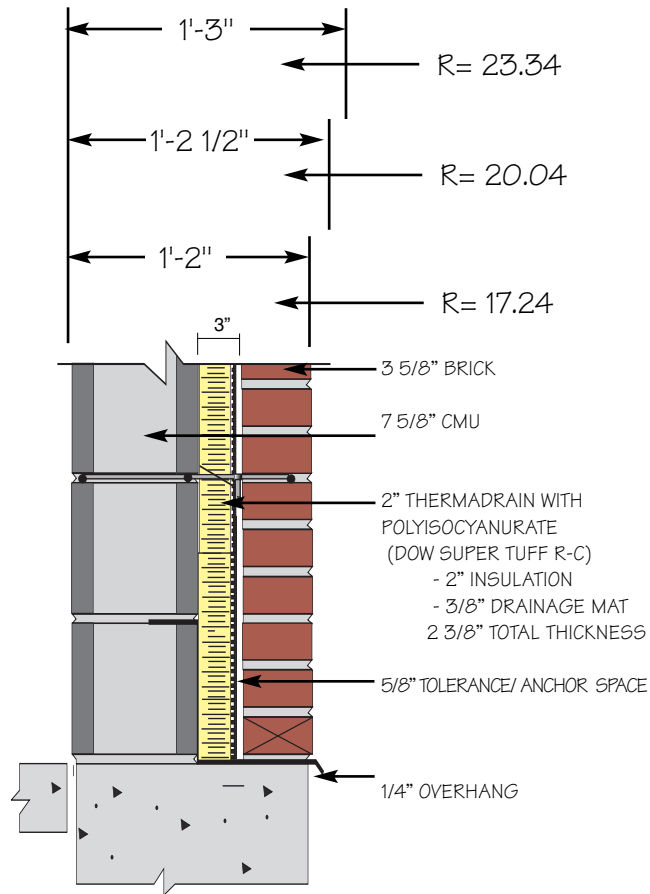

WALL R-VALUE CHART

THERMADRAIN WITH DOW SUPER TUFF R-C / THER-

	ACTUAL THICKNESS	WALL R-VALUE
1 1/2" THERMADRAIN - SUPER TUFF R-C	1 7/8"	R = 14.04
2" THERMADRAIN - SUPER TUFF R-C	2 3/8"	R = 17.24
2 1/2" THERMADRAIN - THERMAX	2 7/8"	R = 20.04
3" THERMADRAIN - THERMAX	3 3/8"	R = 23.34
3 1/2" THERMADRAIN - THERMAX	3 7/8"	R = 26.34

THERMADRAIN WITH DOW EXTRUDED POLYSTYRENE

	ACTUAL THICKNESS	WALL R-VALUE WITH DOW EXTRUDED POLYSTYRENE
1 1/2" THERMADRAIN	1 7/8"	R = 11.74
2" THERMADRAIN	2 3/8"	R = 14.24
2 1/2" THERMADRAIN	2 7/8"	R = 16.74
3" THERMADRAIN	3 7/8"	R = 19.34